Oeco
GARDEN ROOMS

Prepared 13 October 2026
OECO-5E58B3DD

Your Concave garden room

Sam, here is your 6.0m × 4.0m Contemporary Western Red Cedar garden office, designed in 3D.



Rendered from your design. Furniture, planting and the garden are illustrative.

6.0m × 4.0m
External size

24.0m²
Footprint

2.50m
Height, within permitted development

YOUR PRICE

£35,094

Oeco's published prices (13 October 2026), with delivery, foundations and installation. Plus 1 quoted item.

Includes Oeco's October offer: 5% off and 6 free upgrades in your design, on orders placed before 31 October 2026.


Book a call with Oeco

Free, no obligation. Or call free on 0800 170 1270.


Scan to book

Your room from every side

Western Red Cedar, vertical cladding, anthracite fascia and trims (Contemporary design), a framed porch under the canopy.

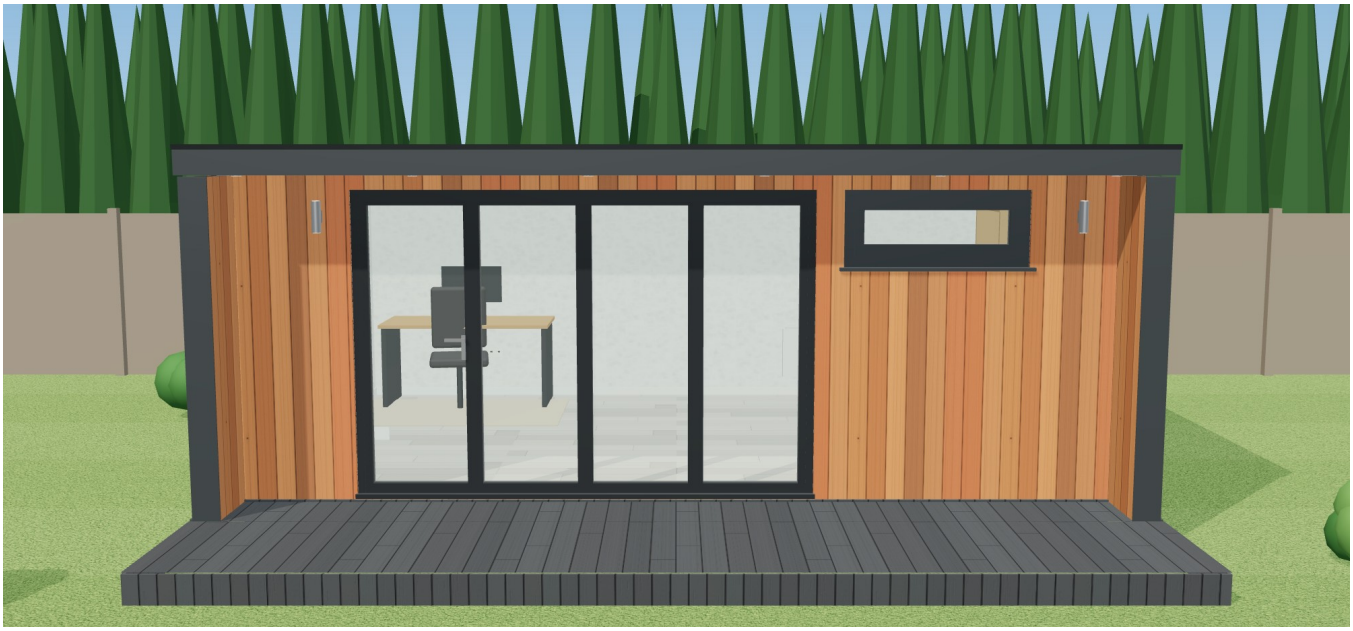


FRONT

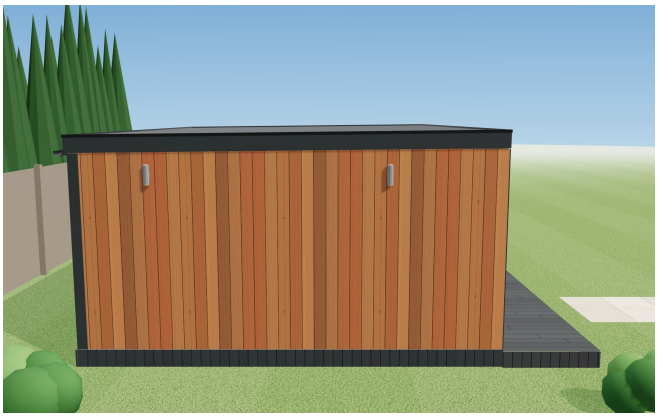

LEFT SIDE



RIGHT SIDE

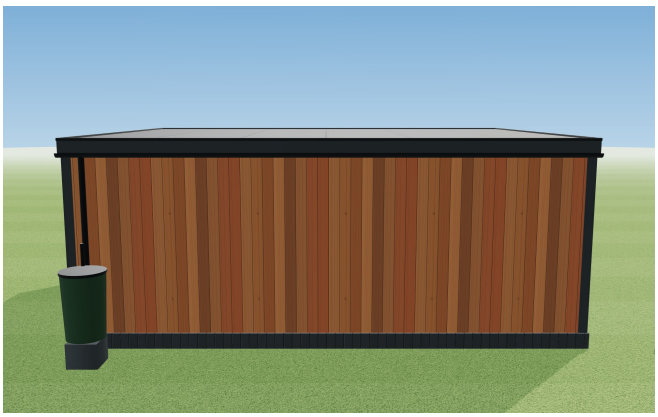

BACK




FROM THE FRONT CORNER

Step inside


Plastered walls and ceiling, light grey oak laminate. Furniture is shown for scale and is not included.



LOOKING IN FROM THE DOORS

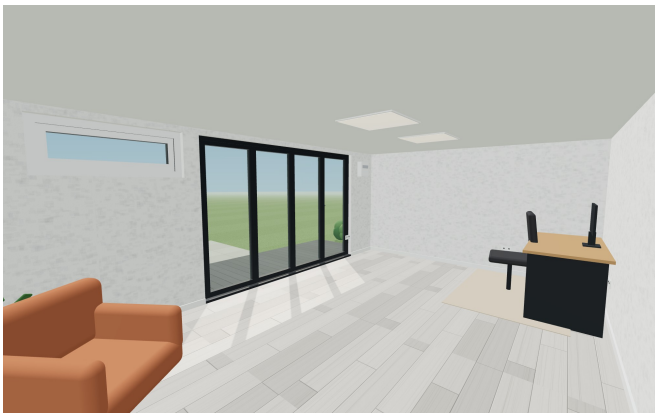

LOOKING BACK TOWARDS THE DOORS

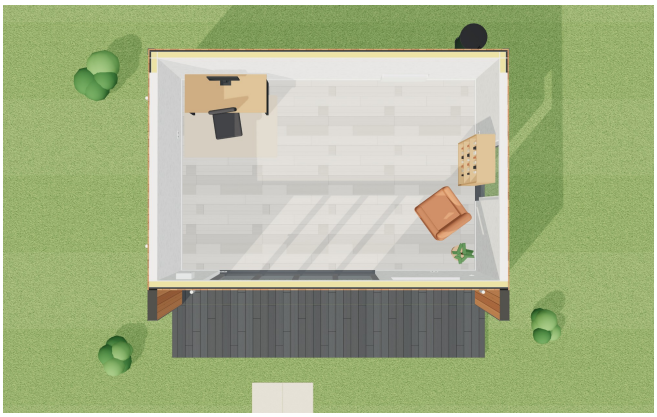

FROM ABOVE, ROOF OFF



AT DUSK

Inside

Walls and ceiling: Plasterboarded and skimmed, ready to paint

Floor: Light grey oak laminate


Electrics: Consumer unit, 6 double sockets, two-way switch, Part P certificate

Lighting: 600 × 600mm LED ceiling panel, 1 more 600mm panel

Heating: 1 electric panel heater, 1.5kW

Your plan

External dimensions in metres; about 20.9m² inside the 160mm walls. Doors in olive, windows in blue; the dashed line is the roof edge, the olive outline the decking.

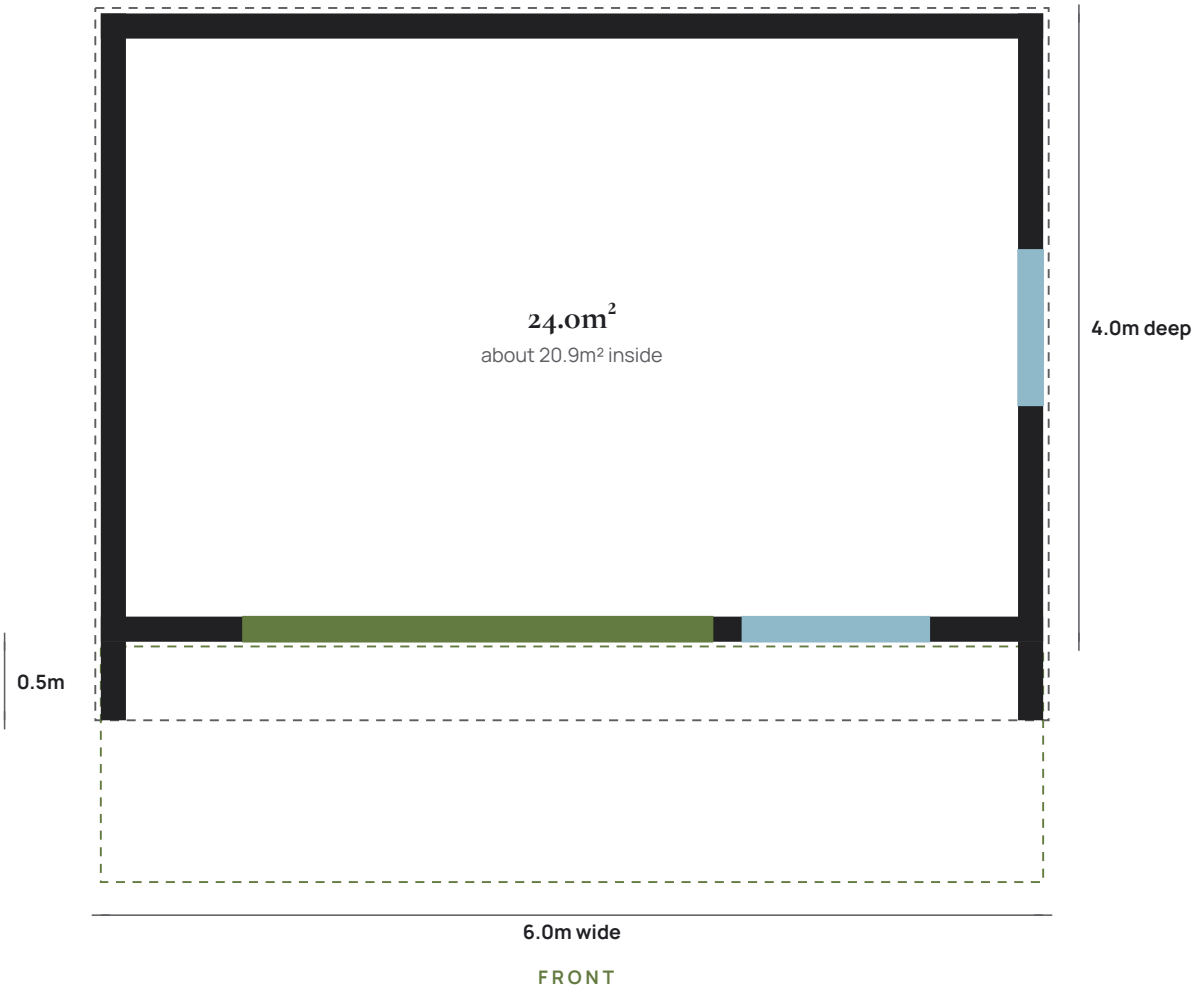

Doors and windows

Front wall: Aluminium bi-folding doors, 3.0m	3000 × 2020mm, 0.90m from the left corner
Front wall: Wide opening window, 1200 × 500mm	1200 × 500mm, 4.08m from the left corner
Right side: Tall fixed glass panel, 1.0m	1000 × 2020mm, 1.50m from the left corner

Your specification

Everything in your design, and how each item is priced.

Building

Shape	Concave: a recessed front porch	£32,769
External size	6.0m wide × 4.0m deep (24.0m² footprint, about 20.9m² inside), plus the porch and canopy about 0.5m in front	
Style	Contemporary Western Red Cedar	INCLUDED
Height	About 2.50m at the front, falling slightly to the back: within the 2.5m permitted-development limit	INCLUDED
Construction	160mm insulated timber-framed walls, 145mm five-layer roof, 178mm insulated floor, concrete pile foundations	INCLUDED
Use	Garden office (furniture shown for illustration)	

Exterior

Cladding	Western Red Cedar, vertical	INCLUDED
Fascia, corner and base trims	Anthracite PVCu, aluminium roof edges (Contemporary design)	INCLUDED
Porch and canopy	Side walls carried forward to frame a porch, under a roof canopy over the doors	INCLUDED
Decking	Anthracite composite, 1.5m deep across the front	FREE IN OCTOBER
Outside lights	Two up and down wall lights beside the doors, plus 2 more	FREE IN OCTOBER
Canopy downlights	6, one per metre	FREE IN OCTOBER
Gutter	Black half-round gutter and downpipe at the back	INCLUDED
Water butt	100 litres, on the downpipe	FREE IN OCTOBER

Doors and windows

Main doors	Aluminium bi-folding doors, 3.0m, front wall	+£1,695
Included window	Wide opening window, 1200 × 500mm, front wall	INCLUDED
Added	Tall fixed glass panel, 1.0m, right side	+£485
Frames and glass	Anthracite PVCu outside, white inside; A-rated argon-filled Planitherm double glazing; insurance-approved locks	INCLUDED
Acoustic glass	In every door and window	QUOTED

Interior

Walls and ceiling	Plasterboarded and skimmed, ready to paint	INCLUDED
Floor	Light grey oak laminate	INCLUDED
Electrics	Consumer unit, 6 double sockets, two-way switch, Part P certificate	FREE IN OCTOBER
Lighting	600 × 600mm LED ceiling panel, 1 more 600mm panel	+£145
Heating	1 electric panel heater, 1.5kW	FREE IN OCTOBER

Your price

Oeco's published prices on 13 October 2026: the building for your shape, size and style, and each extra at Oeco's price.

YOUR PRICE

£35,094

Plus 1 quoted item. Delivery to UK mainland addresses, foundations and full installation included.

Itemised

Concave 6.0m × 4.0m, Contemporary Western Red Cedar: the building, delivered and installed	**£32,769**
Aluminium bi-folding doors, 3.0m instead of the sliding patio doors	**+£1,695**
Tall fixed glass panel, 1.0m, right side	**£485**
1 extra LED ceiling panel, 600 × 600mm	**£145**
2 extra double sockets (October offer; normally £30 each)	**Free**
1 electric panel heater (October offer; normally £150 each)	**Free**
2 extra up and down wall lights (October offer; normally £55 each)	**Free**
6 canopy downlights (October offer; normally £45 each)	**Free**
100 litre water butt (October offer; normally £95 each)	**Free**
Composite decking, 1.5m deep across the front (October offer; normally £195/m²)	**Free**
Acoustic glass, about 7.1m² of glazing (£250 per m²)	**Quoted**
Total	**£35,094**

Oeco's October offer: 5% off, already in these prices, and ten free upgrades on orders placed before 31 October 2026. This PDF is not a quotation: Oeco confirms the specification, the price and any site work in writing after its free site survey. Per-m² items are priced on the area the survey measures.

Your next steps

From your call to a finished garden room.

1 Talk it through

Book a call or visit Oeco's showroom in Ripon: ten furnished rooms to walk round, and no pushy sales.

2 Free site survey

Oeco checks the ground, access for a large van and where the room will sit, and can quote a mains connection and bespoke sizes.

3 Order

A 50% deposit secures your installation date, fully refundable if you cancel before installation starts.

4 Installation

Oeco's team installs the room on site, from the foundations to the electrics. You choose exact positions as it is built; the balance is due on completion.

Scan to book your call

Book a call with Oeco

Call free
0800 170 1270

Visit the showroom
Ripon Business Park, HG4 1AJ

Reopen your design
Change anything and see it again

- **10-year structural guarantee**
  And a minimum life span of 30 years and more.
- **Plastered like your home**
  Plasterboarded and skimmed walls and ceiling: no PVC, vinyl or melamine boards.
- **Built for permitted development**
  Designed to the 2.5m maximum height, so planning permission is not normally needed.
- **No base to lay**
  Concrete pile foundations with adjustable steel feet are included: the room sits clear of the ground.
- **145mm five-layer roof**
  Rigid insulated roof panels with an anthracite outer skin and aluminium roof edges.
- **Building garden rooms since 2006**
  Oeco has built garden structures in its own way since 2006.

Oeco Garden Rooms, Unit 3, Charter Road, Navigation Way, Ripon Business Park, Ripon, North Yorkshire, HG4 1AJ. Monday to Friday, 9am to 5pm; Saturdays by appointment. Images are rendered from your design and are illustrative: colours vary by screen and printer.